

Silent series

interpreter booths

The highest ISO standards and requirements as requested by users have resulted in the Audipack "Silent Series" interpreter booths. The Silent Series consists of three versions: Silent 6300, Silent 9600 and 9700 series. All versions are fully transportable in optional flightcases.



Audipack[®]

It's great to have solutions...

The **Silent Series** are

easy and quick to install

**For effective interpretation, silence is required.
The best solution is an Audipack interpreter booth.**



In developing these booths, Audipack has paid full attention to a number of requirements e.g. flexibility, weight, good looks, high-quality materials, ease of use and durability. The scratch resistant surface combined with anodised aluminium frame, gives an attractive and professional appearance.

The Silent Series are easy and fast to install.
One person can do the job.

All elements and panels are interchangeable, so there is no difficulty in adapting the construction to local conditions. Even the door can be placed on any side. The roof elements are connected to each other in the same way as the wall, resulting in a safe and solid construction.

Silent 9600 and 9700 series interpreter booths comply with the ISO 4043:2016 standard. Silent 6300 complies with ISO 4043:1998.

- ▲ **ISO 4043:2016 (latest version) approved**
- ▲ **Panoramic view windows**
- ▲ **Advanced cable management**
- ▲ **Quick installation**

For more information, ask for our Silent Series brochure.



9600 SILENT SERIES, ISO 4043:2016, INTERPRETER BOOTH



Ref.

External dimensions in mm
Internal dimensions
Weight incl. safety glass and table
Colour exterior

Colour interior
Sound insulation capacity
Number of booth parts incl. table
Table dimensions in mm
Ventilation
Lights
Door



P4600

W 1682 x D 1682 x H 2041 excl. ventilation
W 1600 x D 1600 x H 2000
210 Kg
Light grey (approx. RAL 7042)
Other colours available on request
Dark grey and white
Better than ISO 4043:2016
11
1600 x 500
Ventilation B2, detachable (height: 170 mm)
LED light*
Option to either place the door at the left, right or at the back side of the cabin




* Also available with ventilation B and without LED light: **P4601**

Silent series sound insulation capacity

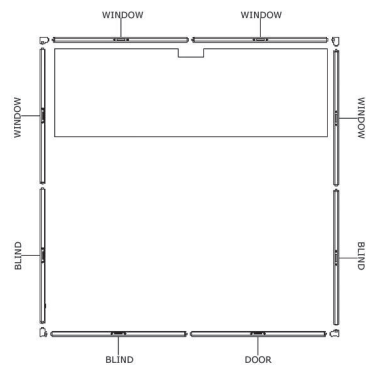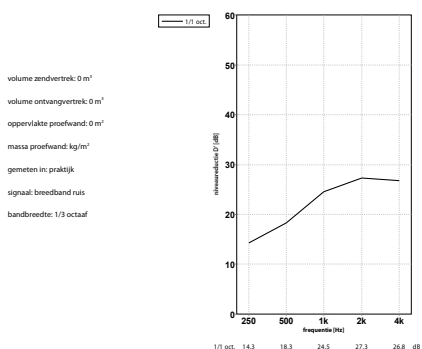

Cable passage




LED light



Table



Ventilation



9700 SILENT SERIES, ISO 4043:2016, COMPACT IN TRANSPORT



Ref.

External dimensions in mm
Internal dimensions
Weight incl. safety glass and table
Colour exterior



Colour interior
Sound insulation capacity
Number of booth parts incl. table
Table dimensions in mm
Including floor
Ventilation
Lights
Door

P4602


W 1682 x D 1682 x H 2041 excl. ventilation
W 1600 x D 1600 x H 2000
210 Kg
Light grey (approx. RAL 7042)
Other colours available on request
Dark grey and white
Better than ISO 4043:2016
16
1600 x 500
no
Ventilation B2, detachable (height: 170 mm)
LED light*
Option to either place the door at the left, right or at the back side of the cabin



Silent series sound insulation capacity

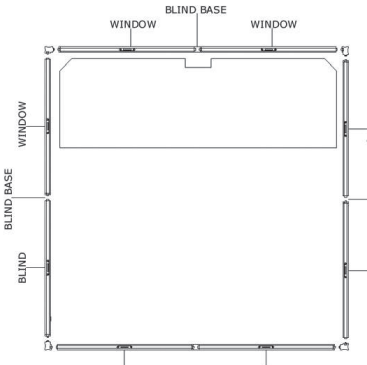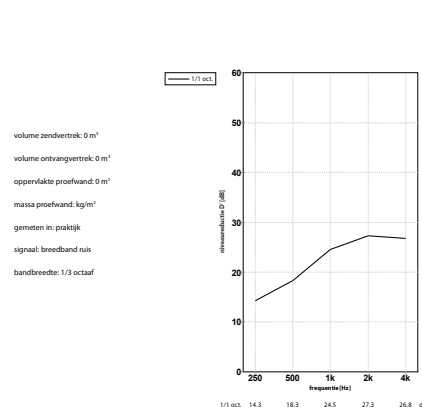

Cable passage




LED light



Table



Ventilation





6300 SILENT SERIES, ISO 4043:1998



Ref.	P1483
External dimensions in mm	W 1720 x D 1720 x H 2280 incl. ventilation and adjustable feet
Internal dimensions	W 1600 x D 1600 x H 2000
Weight incl. safety glass and table	340 Kg
Colour	Light grey (approx. RAL 7042) Other colours available on request
Sound insulation capacity	Better than ISO 4043:1998 According to DIN 56924*
Number of booth parts incl. table and floor	13
Table dimensions in mm	1600 x 500
Including floor	yes
Ventilation	Included
Optional	Extension sets to 3 or 4 person booth
* DIN 56924 approved only when the optional double glass is mounted	




Silent series sound insulation capacity - ISO 4043:1998

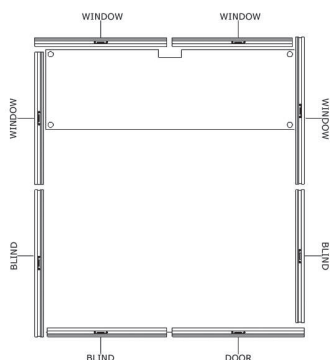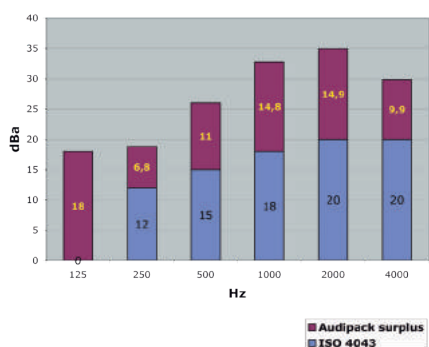

Adjustable feet



Ventilation A



Rear view



Cable passage



9300 SILENT SERIES, 1 PERSON BOOTH

Ref.	P4019
Type	1 person booth
External dimensions in mm	W 814 x D 1682 x H 2041 excl. ventilation
Weight incl. safety glass and table	150 Kg

ACCESSORIES

FLIGHTCASES

Transport your interpreter booth nice and safe in a Audipack flightcase.



Ref.	5604+5887	15645	17495	8969
Suitable for Booth Description	6300 Set of 2	9600 Front loader	9300 1 person (P4019) Front loader	9700 Front loader (standing model)

ASSEMBLY AID



Ref. P1866