

ANTI CRASH LED

# In Screen

CURVE P2.6



## INSCREEN P2.6 CURVE + CORNER 90°

### PARAMÈTRES

- Pixel Pitch(mm): 2.6
- Pixel Density(dot/m2): 147456
- LED Type: SMD2121
- Module Size(mm\*mm): 250\*250
- Cabinet Size(mm\*mm\*mm): 500\*500\*73
- Cabinet Weight(±0.25kg): 8
- Cabinet Resolution(px\*px): 192\*192
- Viewing Angle(Deg): H160/V120
- Brightness(cd/m2): 1000
- Gray Scale(bit): 16
- Refresh Rate(Hz): 3840
- Max Power Consumption(W/sqm): 400
- Average Power Consumption(W/sqm): 120
- Input Voltage(V): AC 100-240
- Ingress Protection: IP20
- Working Environment: Indoor



In Screen CURVE P2.6  
ANTI CRASH LED  
Corner Protectors / Curve Splicing  
Fast Installation / Hot Plug




#### Special Angle Lock

Multiple creative shape splicing, can be applied in varied situation



#### Mixing Splicing

Compatible module, different cabinet support mixing splicing




High Quality Module  
module support front service



#### Up & Down Fast Lock

Quick installation by single person

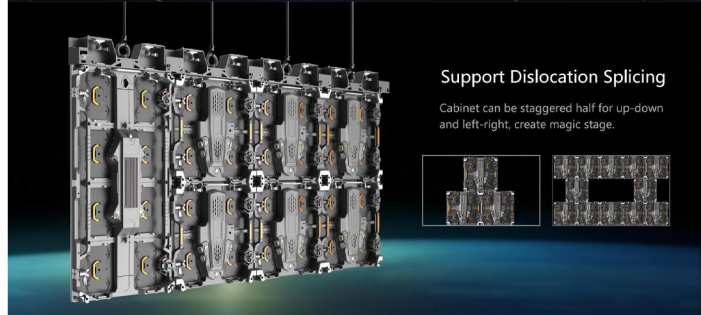

#### Support Dislocation Splicing

Cabinet can be staggered half for up-down and left-right, create magic stage.

#### Hanging Bar & Ground Bar in Common Use

